


ProRox® PS 960 ALU

with WR-Tech

ProRox PS 960 is an aluminum foil faced mandrel wound pipe section. The insulation sections are made out of stone wool and are produced with an innovative water repellent binder called WR-Tech to mitigate the risk of corrosion under insulation.

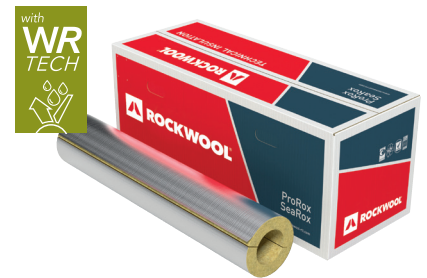

Application

The highly durable insulation sections are supplied split and hinged for easy snap-on assembly and are especially suitable for thermal and acoustic insulation of industrial pipe work.

Product properties in accordance with ASTM C547

Properties	Performance								Norms
Thermal conductivity at mean temperature	T_m (°F)	100	200	300	400	500	600	700	ASTM C335
	λ (BTU.in/hr.ft ² .°F)	0.25	0.29	0.35	0.40	0.47	0.56	0.63	
	T_m (°C)	38	93	149	204	260	316	371	
	λ (W/mK)	0.036	0.042	0.050	0.058	0.068	0.081	0.091	
Maximum use temperature	1,200°F (649°C) the outer surface temperature for ALU faced products should be limited to 80°C (176°F)								ASTM C447
Sag resistance	$\leq 2\%$ at 1,200°F (649°C)								ASTM C411
Linear shrinkage	$\leq 1\%$ at 1,200°F (649°C)								ASTM C356
Surface burning characteristics	Flame spread index = 0; Smoke development index = 0								ASTM E84
Reaction to fire	Non combustible								IMO 2010 FTPC
Corrosion resistance	Evaluation on external stress corrosion cracking tendency of austenitic stainless steel = Passed								ASTM C692 / ASTM C795
	Chemical analysis for Cl ⁻ , F ⁻ , Na ⁺ , SiO ₄ ⁴⁻ : Results fall within acceptability limits of ASTM C795								ASTM C871 / ASTM C795
	Trace quantity of water leachable chloride ions: ≤ 10 ppm								EN 13468
Water absorption	≤ 0.04 lb/ft ² (≤ 0.2 kg/m ²) ≤ 0.04 lb/ft ² (≤ 0.2 kg/m ²) (After 24 hrs. pre-heating at 482°F (250°C))								EN 13472
Vapor sorption	$< 1\%$ Weight								ASTM C1104
Influence on coating systems	Free from substances (e.g. silicone oil) that might impair surface wetting								VW 3.10.7

Compliance

- ProRox PS 960 ALU Pipe Sections fully comply with the requirements as set by internationally recognized standards like ASTM C547: Grade A for Type I, II, IV. EN 14303, CINI 2.2.03, VDI 2055 and ASTM C795.
 - Above product properties reflect only to ASTM standards. Compliance and Performance according to European (EN) standards can be found on our website. Please contact our sales representatives for an extended list of approvals & certifications.
- + Noise reduction data available in accordance to ISO 15665.

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.